

REACH NEW HEIGHTS

DISCOVER HIGH-PERFORMANCE DIGITAL HEIGHT GAUGES VALID UNTIL MARCH 31, 2021



High-Performance 1D Height Gauge Series

518-246



QM-HEIGHT - ABSOLUTE 1D HEIGHT GAUGE


> Easy to use 1D height measuring instrument with ABSOLUTE Scale.

- > Types with and without pneumatic drive mechanism are available.
- > This height gauge features various data output functions such as DIGIMATIC, USB, or wireless (via U-WAVE) connections.
- > You can easily implement frequently used measurements, such as inside/outside diameter and pitch calculations, by icon-based commands that also support easy one-key operations.





Measurement examples



SEE WHAT THE QM-HEIGHT ABSOLUTE 1D HEIGHT GAUGE CAN DO FOR YOU!



HIGH-PERFORMANCE

Milutoyo

https://shop.mitutoyo.eu/pim/upload/mitutoyoData/leafLet/base/ pre1424(2)_qm_height_small.pdf



Trade-in Trade-up offer SAVE UP TO 1.200 €¹⁾

No.	Range [mm]	Design	Digital Step [mm]	Accuracy [µm]	Air floating	List price €	Promotion price €
PROMO009	0–350	QM-Height 1D height gauge (518-240) incl. AC-Adapter (06AFZ950D)	0,001	±(2,4+2,1l/600)µm		3.555,00	2.655,00
PROMO010	0–600	QM-Height 1D height gauge (518-242) incl. AC-Adapter (06AFZ950D)	0,001	±(2,4+2,1l/600)μm		4.346,00	3.246,00
PROMO011	0–350	QM-Height 1D height gauge (518-244) incl. AC-Adapter (06AFZ950D)	0,001	±(2,4+2,1l/600)µm	•	3.919,00	2.919,00
PROMO012	0–600	QM-Height 1D height gauge (518-246) incl. AC-Adapter (06AFZ950D)	0,001	±(2,4+2,1l/600)µm	-	4.710,00	3.510,00

¹⁾A high performance 1 or 2D height measuring device of any brand, which is equipped with a controller or operation box, can be replaced by LH-600E/EG or QM-Height. For more information, or to assess your current instrument for trade in, please contact your local Mitutoyo office or distributor.

Special offer for new customers

No.	Range	Design	Digital Step	Accuracy	Air	List	Promotion
	[mm]		[mm]	[µm]	floating	price €	price €
518-240	0–350	QM-Height 1D height gauge	0,001	±(2,4+2,1l/600)µm		3.485,00	2.799,00
518-242	0–600	QM-Height 1D height gauge	0,001	±(2,4+2,1l/600)µm		4.276,00	3.399,00
518-244	0-350	QM-Height 1D height gauge	0,001	±(2,4+2,1l/600)µm		3.849,00	2.999,00
518-246	0–600	QM-Height 1D height gauge	0,001	±(2,4+2,1l/600)µm		4.640,00	3.699,00


Optional accessories

No.	Designation	Remarks	List price €	Promotion price€
936937	Digimatic Cable (1m)	For QM-Height	48,00	_
965014	Digimatic Cable (2m)	For QM-Height	62,00	_
06AFM380D	USB Input Tool Direct Cable (2m)	For QM-Height	107,00	-
02AZD880G	U-WAVE-T Wireless Transmitter*	For QM-Height	163,00	_
02AZD790D	U-WAVE-T Connection Cable	For QM-Height	87,00	-
02AZE990	U-WAVE Mounting Plate	For QM-Height	35,00	-
06AFZ950D	AC-Adapter 6V DC, 2A	For QM-Height	70,00	59,90
12AAC072	Depth Probe	For QM-Height / Linear Height	172,00	149,00
901-124	Granite Plate	630 x 630 x 70 mm; DIN 876; Grade 0	689 ,00	589,00
901-125	Granite Plate	1000 x 630 x 100 mm; DIN 876; Grade 0	1.280,00	1.089,00
901-932	Stand	Granite Plate Stand for 901-124	348,00	299,00
901-933	Stand	Granite Plate Stand for 901-125	38 4,00	329,00

* Receiver U-WAVE-R (sold separately) is necessary to receive data in to PC.









The Video:

QM Height 1D Measurement -100% boosted quality control



High-Performance 2D Linear Height Series



ISTATISTICS 2012-05-18 20:01 CHI stogram> Element [2] Ho. [1]-[500] 0 ABCOEF CHI JICL MIDPORSTUDIOV/2 0 0 Press [CONICEL] to return to the previous state. [DRIMT]:Printing.

SEE WHAT LINEAR HEIGHT LH-600 E/EG 2D HEIGHT GAUGE CAN DO FOR YOU!

[2]

Nominal 100.0000 USL 100.0100 LSL 99.9900 Nax. 100.0019 Nin. 9954 Press [CMICEL] to return to the previous state. [PRINT]:Printing.

13-0 5003

[500] [2012-05-18 18:12]

[2012-05-18 18:20]



The Videos: Linear Height LH-600E

Mitutoyo's high quality linear height gauge introduced

https://youtu.be/2kObNq0aTpo



 and discover how easy it is to perform data output with Linear Height LH-600E
https://youtu.be/ugjDYkFjyms

LINEAR HEIGHT LH-600 E/EG 2D HEIGHT GAUGE

> High-performance 2D measuring with a pneumatic drive

- > 5.7-inch color LCD TFT improves display readability and operation.
- > Self-explanatory control pad with color LCD offers various functions such as the automatic running of pre-learned part programs.

LH-600EG

Model with hand grip. The button to activate the air cushion is pre-installed in the power grip.

4170

м

> Two different models with ergonomic hand grip (EG type) or without (E type) are available.

LH-600E Design without hand grip.

Screen Display & Printer Output Examples

CHORMAL 3	2012-05-18	20:14	CHORE	
2	00.4145mm			200
	cularity .00, 200.00] 0. 0024 mm		C V	isplay of perp T=0.0024 mn A
A =	90. 0004 DEG	TOL		7
F =	0.0016 mm		ĥ	m
[EHTER]: Ending [→],[←]: Disp		_		R]: Ending the [[]: Printing.



Learn all Functions, Advantages, Tips & Tricks first hand

from our Product Specialist! Wed, Jun 10, 2020 11:00 AM - 12:00 PM CEST

Register now!

https://attendee.gotowebinar.com/register/8639378937622629648



The Product Leaflet: LINEAR HEIGHT HIGH PERFORMANCE 2D MEASUREMENT SYSTEM WITH EXCEPTIONAL ACCURACY

https://shop.mitutoyo.eu/pim/upload/mitutoyoData/leafLet/base/pre1286(3)linear_height_small.pdf



Irade-	Ir
SAVE 	J

No.	Range [mm]	Design	Digital Step [mm]	Accuracy [µm]	Air floating	List price €	Promotion price€
	[11111]	Lineer Height III COO E height geure	[11111]	[hiii]	noating	price c	price c
PROMO013	0–600	Linear Height LH-600 E height gauge (518-351D-21) incl. Stylus kit (K650986)	0,0001	±(1,1+0,6l/600)µm		6.464,00	4.964,00
PROMO014	0–600	Linear Height LH-600 EG height gauge (518-352-21**) incl. Stylus kit (K650986)	0,0001	±(1,1+0,6l/600)µm	-	6.784,00	5.284,00
* Excluding quantizing error ** With "Power Grip" for movement							

¹⁾A high performance 1 or 2D height measuring device of any brand, which is equipped with a controller or operation box, can be replaced by LH-600E/EG or QM-Height. For more information, or to assess your current instrument for trade in, please contact your local Mitutoyo office or distributor.

Special offer for new customers

No.	Range [mm]	Design			
518-351D-21	0–600	Linear Height LH-600 E height gauge			
518-352D-21**	0–600	Linear Height LH-600 EG height gauge			
* Excluding quantizing error ** With "Power Grip" for movement					

Optional accessories


No.	Designation	Remarks	List price €	Promoti- on price €
63AAA043	DMX-0-1 USB	For Linear Height: HID (Human Interface Device) keyboard format Interface to send measuring data directly e.g. to MS Excel	260,00	219,00
12AAA807D	RS-232C Cable	For Linear Height: Connection Cable from Linear Height to HID Interface 63AAA043	61,00	51,90
K650986	Stylus Kit	For Linear Height: incl. holder, stylus: Ø=1, 2, 3, 4 mm a.s.o.	396,00	339,00
12AAN050	Receipt Printer	For Linear Height	1.286,00	1.099,00
12AAC072	Depth Probe	For QM-Height / Linear Height	172,00	149,00
901-124	Granite Plate	630 x 630 x 70 mm; DIN 876; Grade 0	689,00	589,00
901-125	Granite Plate	1000 x 630 x 100 mm; DIN 876; Grade 0	1.280,00	1.089,00
901-932	Stand	Granite Plate Stand for 901-124	348,00	299,00
901-933	Stand	Granite Plate Stand for 901-125	384,00	329,00

K650986 Stylus Kit M3 "Linear Height" 12AAN050 Receipt Printer





n Trade-up offer P TO 1.500 €¹)

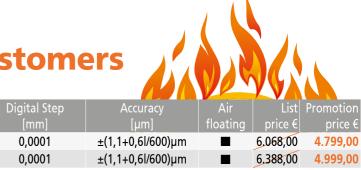

12AAC072

Depth Probe





Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Find additional product literature and our complete catalogue here.

www.mitutoyo.eu

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MCOSMOS are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/ regions. RENISHAW is a registered trademark of RENISHAW PLC. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

Mitutoyo

Mitutoyo Europe GmbH

Borsigstraße 8-10 41469 Neuss Germany Tel. +49 (0) 2137-102-0 Fax +49 (0) 2137-102-351 info@mitutoyo.eu

www.mitutoyo.eu